

 **ROYAL**[®]
SUPER



**PRODUCT
CATALOGUE**

رويال سوپر



LUBRICANTS FACTORY

WWW.ROYALSUPER.AE

OVER 22 YEARS OF CUSTOMER SATISFACTION AND ENGINEERING EXCELLENCE

To be the leading provider of high-quality lubricants and related products that enhance the performance and longevity of machinery and equipment while reducing the impact on the environment.

Our mission is to provide our customers with superior lubrication solutions that optimise equipment performance, extend equipment life, and minimise environmental impact. We strive to achieve this by utilising advanced technologies, innovative products, and a highly trained and motivated team. We are committed to conducting our business with integrity, transparency, and social responsibility, and to continuously improving our processes and products to meet the evolving needs of our customers and the industry.

Teams depend on the personalities of the members as well as the leadership style of the managers. However, the ingredients for what makes a successful team are similar across the board. Having mutual respect, common and aligned goals, open communication, and patience can all help make for a successful team.

Leading manufacturer and supplier of lubricants, gear oil fluids, grease, and coolant worldwide. Superior-quality oil is important, and fundamental characteristics of your vehicle depend on it like smooth running, fuel efficiency, performance, and emissions. Multi-grade synthetic engine oils for modern petrol engines have optimal viscosity at wide ranging temperatures.



Royal Super Lubricants Brand was founded in 2015 as a lubricant manufacturer in the UAE and has been a supplier and exporter of all types of lubricants worldwide for over 22 years, with a strong presence in Asia, Africa, and Europe. The highest international standards of quality, meeting ISO 9001:2015.

Our laboratory was set up and equipped with the latest technology and machinery to carry out testing and quality control measures to ensure quality control. The advanced technology logistics system allows for unlimited growth opportunities, guarantees high-quality products, and has an extraordinary ability to make faster deliveries worldwide.

All our products are made with 100% virgin base oil. We are a leading manufacturer and supplier of lubricants, gear oil, hydraulic oil, automatic transmission fluid, brake fluid, grease, industrial oil, coolant, and antifreeze worldwide. Superior-quality oil is important, and fundamental characteristics of your vehicle depend on it like smooth running, fuel efficiency, performance, and emissions.

Multi-grade synthetic engine oils for modern petrol engines have optimal viscosity at a wide range of temperatures. Provides quality products and services for our customers. In doing so, we act responsibly toward those who work for us, the communities in which we operate, and our business partners. These are the core values that guide our approach to business.



License No: 3947

SCHEDULE A - LICENSE AGREEMENT

The marks referred to and licensed under the Agreement between API and
 LUK INTERNATIONAL TRADING
 may be used through 31-Mar-2024 are as follows:

API SERVICE SYMBOL

Licensee is authorized to display the API Certification Mark on the following products:



BRAND NAME	SAE VISCOSITY GRADE	API SERVICE CATEGORY	CLASSIFICATION
ROYAL SUPER	0W-16	SP	Resource Conserving, SN PLUS
ROYAL SUPER	0W-20	SP	Resource Conserving, SN PLUS
ROYAL SUPER	0W-30	SP	Resource Conserving, SN PLUS
ROYAL SUPER	5W-20	SP	Resource Conserving, SN PLUS
ROYAL SUPER	5W-30	SP	Resource Conserving, SN PLUS
ROYAL SUPER	5W-30	SN	
ROYAL SUPER	5W-40	SM	
ROYAL SUPER	10W-30	SP	Resource Conserving, SN PLUS
ROYAL SUPER	10W-30	SN	
ROYAL SUPER	10W-30	SL	
ROYAL SUPER	10W-40	SN	
ROYAL SUPER	10W-40	SL	
ROYAL SUPER	15W-40	SL	
ROYAL SUPER	15W-40	CI-4/SL	
ROYAL SUPER	20W-50	SL	
ROYAL SUPER	20W-50	CI-4	

Bill O'K

Manager - EOLCS/DEF/MOM

Date: 28-Dec-2023

Engine Oil Licensing and Certification System

Copyright 2020 - American Petroleum Institute, all rights reserved. API, the API logo, the API Certification Mark ("Starburst"), the API Service Symbol ("Donut"), and the API Certification Mark ("Shield") are either trademarks or registered trademarks of API. 2020-342 | 02.20

To verify the authenticity of this document, go to: engineoil.api.org/Directory/EolcsSearch

License No: 3947

SCHEDULE A - LICENSE AGREEMENT

The marks referred to and licensed under the Agreement between API and
LUK INTERNATIONAL TRADING
may be used through 31-Mar-2024 are as follows:

API CERTIFICATION MARK

Licensee is authorized to display the API Certification Mark on the following products:



BRAND NAME	SAE VISCOSITY GRADE	ILSAC SPECIFICATION
ROYAL SUPER	0W-20	GF-6A
ROYAL SUPER	0W-30	GF-6A
ROYAL SUPER	5W-20	GF-6A
ROYAL SUPER	5W-30	GF-6A
ROYAL SUPER	10W-30	GF-6A

Bill O'K

Manager - EOLCS/DEF/MOM

Date: 28-Dec-2023

Engine Oil Licensing and Certification System

Copyright 2020 - American Petroleum Institute, all rights reserved. API, the API logo, the API Certification Mark ("Starburst"), the API Service Symbol ("Donut"), and the API Certification Mark ("Shield") are either trademarks or registered trademarks of API. 2020-342 | 02.20

To verify the authenticity of this document, go to: engineoil.api.org/Directory/EolcsSearch

License No: 3947

SCHEDULE A - LICENSE AGREEMENT

The marks referred to and licensed under the Agreement between API and
LUK INTERNATIONAL TRADING
may be used through 31-Mar-2024 are as follows:

API CERTIFICATION MARK

Licensee is authorized to display the API Certification Mark on the following products:



BRAND NAME

ROYAL SUPER

SAE VISCOSITY
GRADE

0W-16

ILSAC SPECIFICATION

GF-6B

xxW-yy

SAE
5W-30

Engine Oil Licensing and Certification System

Copyright 2020 - American Petroleum Institute, all rights reserved. API, the API logo, the API Certification Mark ("Starburst"), the API Service Symbol ("Donut"), and the API Certification Mark ("Shield") are either trademarks or registered trademarks of API. 2020-342 | 02.20

To verify the authenticity of this document, go to: engineoil.api.org/Directory/EolcsSearch

A handwritten signature in black ink, appearing to read "Bill O'Keefe".

Manager - EOLCS/DEF/MOM

Date: 28-Dec-2023

Certificate of Registration

This is to Certify that
Quality Management Systems of



**L U K INTERNATIONAL AUTO SPARE PARTS TRADING L.L.C
(ROYAL SUPER)**

**Shop No. 06, Vista Square Hotel Building, Street 21C Naif, Deira
Abdulla Al Ghurair Real Estate, Dubai- PO Box-380672**

has been assessed and found to conform to the requirements of

ISO 9001:2015

for the following scope:

Lubricants and Auto Spare Parts Trading

Certificate No.	: 179AGL0301	
Initial Registration Date	: 13.04.2022	Issuance Date : 15.04.2022
Date of Expiry *	: 14.04.2025	
1st Surve. Due	: 14.04.2023	2nd Surve. Due : 14.04.2024

Director

Accurate Global Ltd.

Address- 27, Old Gloucester Street, London, WC1N3AX, United Kingdom

*Validity of the Certificate is subject to successful completion of surveillance audit on or before of due date. (In case surveillance audit is not allowed to be conducted, this certificate shall be suspended/withdrawal).

Certificate Verification: Please Re-check the validity of certificate at www.accurateiso.com at Active Clients. Certificate is the property of Accurate Global Ltd. London, UK and shall be returned immediately when demanded.



Highest international standards of quality, meeting ISO 9001-2015. Our laboratory was set up and equipped with the latest technology and machinery to carry out testing and quality control measures to ensure quality control.

The advanced technology logistics system allows for unlimited growth opportunities, guarantees high-quality products, and has an extraordinary ability to make faster deliveries worldwide.

LUBRICANTS / OIL

01

LUK International has its own brand of lubricants called Royal Super German Technology Lubricants. Which provides a wide variety of lubricants, including passenger car oil, diesel engine oil, hydraulic oil, and much more.



02

BRAKE FLUIDS

Royal Super brake fluids are formulated for high-performance hydraulic brakes, automotive disc and drum brake systems, anti-slip brake systems, and clutch systems.



03

ATF

Our automatic transmission fluids (ATF) typically contain a variety of chemical components intended to provide the required properties of a particular ATF specification.



04

GREASE

Our greases are premium-quality, high-temperature lithium complex products for bearing applications. These greases are highly recommended for the lubrication of electric motors.



Royal Super Lubricants is one of the leading flagship lubricants under the company of LUK International Auto Spare Parts Trading LLC and one of the leading companies in the United Arab Emirates engaged in the import-export, retail, and wholesale of industrial lubricants, engine oils, and car care items.

Our adaptation strategy, which offers customization of our products to various market needs and requirements, proves our competitive advantage. We pride ourselves on providing our customers with premium service and technologically advanced products that allow us to be competitive and successful in local and global markets.

رويال سوپر

ROYAL[®]
SUPER

PETROL ENGINE OIL



**HIGH
PERFORMANCE OIL**

WWW.ROYALSUPER.AE





ROYAL SUPER ENERGIZE 0W-8 API SP

Fully synthetic motor oil for gasoline engine

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.842
Viscosity @100°C, cSt	ASTM D 445	5.3
Viscosity @40°C, cSt	ASTM D 445	26.1
Viscosity Index	ASTM D 2270	140
Pour Point, °C	ASTM D 97	-42
Flash point °C	ASTM D 92	228
TBN, mgKOH/gm	ASTM D 2896	7.8
Foam Characteristics	ASTM 892	

Download DATA SHEET



Scan QR

AVAILABLE SIZE

1L , 2L , 3L , 4L , 5L , 6L , 20 L , 25L , 60L , 208L , 1000L , 25,000L - Bulk




ROYAL SUPER ENERGIZE 0W-16 API SP

Fully synthetic motor oil for gasoline engine

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.84
Viscosity @100°C, cSt	ASTM D 445	7.4
Viscosity @40°C, cSt	ASTM D 445	38.25
Viscosity Index	ASTM D 2270	165
Pour Point, °C	ASTM D 97	-42
Flash point °C	ASTM D 92	220
TBN, mgKOH/gm	ASTM D 2896	7.2
Foam Characteristics	ASTM 892	

Download DATA SHEET



Scan QR

AVAILABLE SIZE

1L , 2L , 3L , 4L , 5L , 6L , 20 L , 25L , 60L , 208L , 1000L , 25,000L - Bulk



ROYAL SUPER ENERGIZE 0W-20 API SP

Fully synthetic motor oil for gasoline engine

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.842
Viscosity @100°C, cSt	ASTM D 445	8.36
Viscosity @40°C, cSt	ASTM D 445	44.8
Viscosity Index	ASTM D 2270	173
Pour Point, °C	ASTM D 97	-42
Flash point °C	ASTM D 92	220
TBN, mgKOH/gm	ASTM D 2896	7.2
Foam Characteristics	ASTM 892	

Download DATA SHEET



Scan QR

AVAILABLE SIZE

1L , 2L , 3L , 4L , 5L , 6L , 20 L , 25L , 60L , 208L , 1000L , 25,000L - Bulk



ROYAL SUPER ENERGIZE 0W-30 API SP

Fully synthetic motor oil for gasoline engine

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.845
Viscosity @100°C, cSt	ASTM D 445	10.45
Viscosity @40°C, cSt	ASTM D 445	58
Viscosity Index	ASTM D 2270	171
Pour Point, °C	ASTM D 97	-42
Flash point °C	ASTM D 92	225
TBN, mgKOH/gm	ASTM D 2896	7.2
Foam Characteristics	ASTM 892	

Download DATA SHEET



Scan QR

AVAILABLE SIZE

1L , 2L , 3L , 4L , 5L , 6L , 20 L , 25L , 60L , 208L , 1000L , 25,000L - Bulk



ROYAL SUPER ECO BOOST 0W-40 API SP

Fully synthetic motor oil for gasoline engine

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.845
Viscosity @100°C, cSt	ASTM D 445	14.3
Viscosity @40°C, cSt	ASTM D 445	80.9
Viscosity Index	ASTM D 2270	185
Pour Point, °C	ASTM D 97	-48
Flash point °C	ASTM D 92	230
TBN, mgKOH/gm	ASTM D 2896	10
Foam Characteristics	ASTM 892	

Download DATA SHEET



Scan QR

AVAILABLE SIZE

1L , 2L , 3L , 4L , 5L , 6L , 20 L , 25L , 60L , 208L , 1000L , 25,000L - Bulk



ROYAL SUPER ECO BOOST 5W-20 API SN/CF

Fully synthetic engine oil for petrol vehicle

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.855
Viscosity @100°C, cSt	ASTM D 445	7.95
Viscosity @40°C, cSt	ASTM D 445	42.75
Viscosity Index	ASTM D 2270	161
Pour Point, °C	ASTM D 97	-39
Flash point °C	ASTM D 92	215 Min
TBN, mgKOH/gm	ASTM D 2896	7.8
CCS @-30°C,mPa.s	ASTM D 5293	4500

Download DATA SHEET



Scan QR

AVAILABLE SIZE

1L , 2L , 3L , 4L , 5L , 6L , 20 L , 25L , 60L , 208L , 1000L , 25,000L - Bulk



ROYAL SUPER ECO BOOST 5W-30 API SN/CF

Fully synthetic engine oil for petrol vehicle

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.855
Viscosity @100°C, cSt	ASTM D 445	10.8
Viscosity @40°C, cSt	ASTM D 445	63
Viscosity Index	ASTM D 2270	164
Pour Point, °C	ASTM D 97	-39
Flash point °C	ASTM D 92	215 Min
TBN, mgKOH/gm	ASTM D 2896	7.8
CCS @-30°C,mPa.s	ASTM D 5293	4700

Download DATA SHEET



Scan QR

AVAILABLE SIZE

1L , 2L , 3L , 4L , 5L , 6L , 20 L , 25L , 60L , 208L , 1000L , 25,000L - Bulk



ROYAL SUPER ECO BOOST 5W-40 API SN/CF

Fully synthetic engine oil for petrol vehicle

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.855
Viscosity @100°C, cSt	ASTM D 445	14.8
Viscosity @40°C, cSt	ASTM D 445	92
Viscosity Index	ASTM D 2270	169
Pour Point, °C	ASTM D 97	-39
Flash point °C	ASTM D 92	215 Min
TBN, mgKOH/gm	ASTM D 2896	7.8
CCS @-25°C,mPa.s	ASTM D 5293	4950

Download DATA SHEET



Scan QR

AVAILABLE SIZE

1L , 2L , 3L , 4L , 5L , 6L , 20 L , 25L , 60L , 208L , 1000L , 25,000L - Bulk



ROYAL SUPER ECO BOOST 10W-30 API SN/CF

Synthetic engine oil for petrol vehicle

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.86
Viscosity @100°C, cSt	ASTM D 445	10.4
Viscosity @40°C, cSt	ASTM D 445	62.6
Viscosity Index	ASTM D 2270	156
Pour Point, °C	ASTM D 97	-36
Flash point °C	ASTM D 92	215 Min
TBN, mgKOH/gm	ASTM D 2896	7.8
CCS @-25°C,mPa.s	ASTM D 5293	5600

Download DATA SHEET



Scan QR

AVAILABLE SIZE

1L , 2L, 3L, 4L , 5L , 6L, 20 L , 25L , 60L, 208L , 1000L , 25,000L - Bulk



ROYAL SUPER ECO BOOST 10W-40 API SN/CF

Synthetic engine oil for petrol vehicle

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.862
Viscosity @100°C, cSt	ASTM D 445	15.1
Viscosity @40°C, cSt	ASTM D 445	102
Viscosity Index	ASTM D 2270	155
Pour Point, °C	ASTM D 97	-33
Flash point °C	ASTM D 92	215 Min
TBN, mgKOH/gm	ASTM D 2896	7.8
CCS @-25°C,mPa.s	ASTM D 5293	5800

Download DATA SHEET



Scan QR

AVAILABLE SIZE

1L , 2L, 3L, 4L , 5L , 6L, 20 L , 25L , 60L, 208L , 1000L , 25,000L - Bulk



ROYAL SUPER ECO BOOST 10W-30 API SL

Synthetic engine oil for petrol vehicle

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.862
Viscosity @100°C, cSt	ASTM D 445	11.8
Viscosity @40°C, cSt	ASTM D 445	78
Viscosity Index	ASTM D 2270	145
Pour Point, °C	ASTM D 97	-33
Flash point °C	ASTM D 92	220
TBN, mgKOH/gm	ASTM D 2896	7.8
CCS @-25°C,mPa.s	ASTM D 5293	5650

Download DATA SHEET



Scan QR

AVAILABLE SIZE

1L , 2L, 3L, 4L , 5L , 6L, 20 L , 25L , 60L, 208L , 1000L , 25,000L - Bulk



ROYAL SUPER ECO BOOST 10W-40 API SL

Synthetic engine oil for petrol vehicle

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.862
Viscosity @100°C, cSt	ASTM D 445	15.1
Viscosity @40°C, cSt	ASTM D 445	102
Viscosity Index	ASTM D 2270	155
Pour Point, °C	ASTM D 97	-33
Flash point °C	ASTM D 92	215
TBN, mgKOH/gm	ASTM D 2896	7.8
CCS @-25°C,mPa.s	ASTM D 5293	5800

Download DATA SHEET



Scan QR

AVAILABLE SIZE

1L , 2L, 3L, 4L , 5L , 6L, 20 L , 25L , 60L, 208L , 1000L , 25,000L - Bulk



ROYAL SUPER ECO BOOST 15W-40 API SL

High Performance Technology engine oil for petrol vehicle

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.862
Viscosity @100°C, cSt	ASTM D 445	15
Viscosity @40°C, cSt	ASTM D 445	112
Viscosity Index	ASTM D 2270	139
Pour Point, °C	ASTM D 97	-27
Flash point °C	ASTM D 92	220
TBN, mgKOH/gm	ASTM D 2896	7.8
CCS @-15°C,mPa.s	ASTM D 5293	6100

Download DATA SHEET



Scan QR

AVAILABLE SIZE

1L , 2L , 3L , 4L , 5L , 6L , 20 L , 25L , 60L , 208L , 1000L , 25,000L - Bulk



ROYAL SUPER ECO BOOST 20W-50 API SL

High Performance Technology engine oil for petrol vehicle

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.87
Viscosity @100°C, cSt	ASTM D 445	20.4
Viscosity @40°C, cSt	ASTM D 445	176
Viscosity Index	ASTM D 2270	136
Pour Point, °C	ASTM D 97	-27
Flash point °C	ASTM D 92	240
TBN, mgKOH/gm	ASTM D 2896	7.4
CCS @-15°C,mPa.s	ASTM D 5293	7500

Download DATA SHEET



Scan QR

AVAILABLE SIZE

1L , 2L , 3L , 4L , 5L , 6L , 20 L , 25L , 60L , 208L , 1000L , 25,000L - Bulk



ROYAL SUPER ECO BOOST 20W-60 API SL

High Performance Technology engine oil for petrol vehicle

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.878
Viscosity @100°C, cSt	ASTM D 445	25.4
Viscosity @40°C, cSt	ASTM D 445	
Viscosity Index	ASTM D 2270	140
Pour Point, °C	ASTM D 97	-24
Flash point °C	ASTM D 92	238
TBN, mgKOH/gm	ASTM D 2896	7.5
Foam Characteristics	ASTM 892	

Download DATA SHEET



Scan QR

AVAILABLE SIZE

1L , 2L , 3L , 4L , 5L , 6L , 20 L , 25L , 60L , 208L , 1000L , 25,000L - Bulk



ROYAL SUPER ECO BOOST 25W-60 API SL

High Performance Technology engine oil for petrol vehicle

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.878
Viscosity @100°C, cSt	ASTM D 445	25.8
Viscosity @40°C, cSt	ASTM D 445	
Viscosity Index	ASTM D 2270	139
Pour Point, °C	ASTM D 97	-24
Flash point °C	ASTM D 92	238
TBN, mgKOH/gm	ASTM D 2896	7.5
Foam Characteristics	ASTM 892	

Download DATA SHEET



Scan QR

AVAILABLE SIZE

1L , 2L , 3L , 4L , 5L , 6L , 20 L , 25L , 60L , 208L , 1000L , 25,000L - Bulk

رويال سوپر



ROYAL[®]
SUPER



DIESEL
ENGINE OIL

**HIGH
PERFORMANCE OIL**

WWW.ROYALSUPER.AE





ROYAL SUPER PRO TECH 5W-40 API CK-4

Synthetic Pro - Efficient Technology heavy duty diesel engine oil

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.84
Viscosity @100°C, cSt	ASTM D 445	15.1
Viscosity @40°C, cSt	ASTM D 445	94.5
Viscosity Index	ASTM D 2270	170
Pour Point, °C	ASTM D 97	-39
Flash point °C	ASTM D 92	220
TBN, mgKOH/gm	ASTM D 2896	9.9
Foam Characteristics	ASTM 892	

Download DATA SHEET



Scan QR

AVAILABLE SIZE

1L , 2L , 3L , 4L , 5L , 6L , 20 L , 25L , 60L , 208L , 1000L , 25,000L - Bulk



ROYAL SUPER PRO TECH 10W-40 API CK-4

Synthetic Pro - Efficient Technology heavy duty diesel engine oil

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.858
Viscosity @100°C, cSt	ASTM D 445	14.4
Viscosity @40°C, cSt	ASTM D 445	96
Viscosity Index	ASTM D 2270	155
Pour Point, °C	ASTM D 97	-36
Flash point °C	ASTM D 92	225
TBN, mgKOH/gm	ASTM D 2896	9.8
Foam Characteristics	ASTM 892	

Download DATA SHEET



Scan QR

AVAILABLE SIZE

1L , 2L , 3L , 4L , 5L , 6L , 20 L , 25L , 60L , 208L , 1000L , 25,000L - Bulk



ROYAL SUPER PRO TECH 15W-40 API CK-4

Synthetic Pro - Efficient Technology heavy duty diesel engine oil

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.862
Viscosity @100°C, cSt	ASTM D 445	15.4
Viscosity @40°C, cSt	ASTM D 445	120
Viscosity Index	ASTM D 2270	136
Pour Point, °C	ASTM D 97	-33
Flash point °C	ASTM D 92	228
TBN, mgKOH/gm	ASTM D 2896	9.9
Foam Characteristics	ASTM 892	

Download DATA SHEET



Scan QR

AVAILABLE SIZE

1L , 2L , 3L , 4L , 5L , 6L , 20 L , 25L , 60L , 208L , 1000L , 25,000L - Bulk



ROYAL SUPER PRO TECH 10W-40 CI-4/SL

Synthetic Pro - Efficient Technology heavy duty diesel engine oil

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.862
Viscosity @100°C, cSt	ASTM D 445	15
Viscosity @40°C, cSt	ASTM D 445	101
Viscosity Index	ASTM D 2270	156
Pour Point, °C	ASTM D 97	-33
Flash point °C	ASTM D 92	230
TBN, mgKOH/gm	ASTM D 2896	11
Foam Characteristics	ASTM 892	

Download DATA SHEET



Scan QR

AVAILABLE SIZE

1L , 2L , 3L , 4L , 5L , 6L , 20 L , 25L , 60L , 208L , 1000L , 25,000L - Bulk



ROYAL SUPER PRO TECH 15W-40 API CI-4/SL

Synthetic Pro - Efficient Technology heavy duty diesel engine oil

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.863
Viscosity @100°C, cSt	ASTM D 445	15.15
Viscosity @40°C, cSt	ASTM D 445	119
Viscosity Index	ASTM D 2270	133
Pour Point, °C	ASTM D 97	-27
Flash point °C	ASTM D 92	220
TBN, mgKOH/gm	ASTM D 2896	11
CCS @-20°C,mPa.s	ASTM D 5293	6450

Download DATA SHEET



Scan QR

AVAILABLE SIZE

1L , 2L, 3L, 4L , 5L , 6L, 20 L , 25L , 60L, 208L , 1000L , 25,000L - Bulk



ROYAL SUPER PRO TECH 20W-50 API CH-4

Clean-Shield Technology heavy duty diesel engine oil

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.87
Viscosity @100°C, cSt	ASTM D 445	20.2
Viscosity @40°C, cSt	ASTM D 445	170
Viscosity Index	ASTM D 2270	138
Pour Point, °C	ASTM D 97	-27
Flash point °C	ASTM D 92	240
TBN, mgKOH/gm	ASTM D 2896	10.1
CCS @-15°C,mPa.s	ASTM D 5293	7250

Download DATA SHEET



Scan QR

AVAILABLE SIZE

1L , 2L, 3L, 4L , 5L , 6L, 20 L , 25L , 60L, 208L , 1000L , 25,000L - Bulk



ROYAL SUPER PRO TECH SAE-40 API CF/SF

Super premium heavy duty diesel engine oil

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.872
Viscosity @100°C, cSt	ASTM D 445	15.1
Viscosity Index	ASTM D 2270	123
Pour Point, °C	ASTM D 97	-27
Flash point °C	ASTM D 92	240
TBN, mgKOH/gm	ASTM D 2896	8

Download DATA SHEET



Scan QR

AVAILABLE SIZE

1L , 2L, 3L, 4L , 5L , 6L, 20 L , 25L , 60L, 208L , 1000L , 25,000L - Bulk



ROYAL SUPER PRO TECH SAE-50 API CF/SF

Super premium heavy duty diesel engine oil

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.872
Viscosity @100°C, cSt	ASTM D 445	20.2
Viscosity @40°C, cSt	ASTM D 445	164
Viscosity Index	ASTM D 2270	132
Pour Point, °C	ASTM D 97	-27
Flash point °C	ASTM D 92	240
TBN, mgKOH/gm	ASTM D 2896	8

Download DATA SHEET



Scan QR

AVAILABLE SIZE

1L , 2L, 3L, 4L , 5L , 6L, 20 L , 25L , 60L, 208L , 1000L , 25,000L - Bulk



ROYAL SUPER PRO TECH SAE-60 API CF

Super premium heavy duty diesel engine oil

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.879
Viscosity @100°C, cSt	ASTM D 445	24.3
Viscosity @40°C, cSt	ASTM D 445	267
Viscosity Index	ASTM D 2270	115
Pour Point, °C	ASTM D 97	-21
Flash point °C	ASTM D 92	240
TBN, mgKOH/gm	ASTM D 2896	8

Download DATA SHEET



Scan QR

AVAILABLE SIZE

1L , 2L , 3L , 4L , 5L , 6L , 20 L , 25L , 60L , 208L , 1000L , 25,000L - Bulk



ROYAL SUPER PRO TECH SAE-70 API CF

Super premium heavy duty diesel engine oil

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.879
Viscosity @100°C, cSt	ASTM D 445	29.5
Viscosity @40°C, cSt	ASTM D 445	328.8
Viscosity Index	ASTM D 2270	123
Pour Point, °C	ASTM D 97	-21
Flash point °C	ASTM D 92	240
TBN, mgKOH/gm	ASTM D 2896	8

Download DATA SHEET



Scan QR

AVAILABLE SIZE

1L , 2L , 3L , 4L , 5L , 6L , 20 L , 25L , 60L , 208L , 1000L , 25,000L - Bulk



ROYAL SUPER PRO TECH HD-50 API CF/SF

Super premium diesel engine oil

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.884
Viscosity @100°C, cSt	ASTM D 445	20.2
Viscosity @40°C, cSt	ASTM D 445	234
Viscosity Index	ASTM D 2270	98
Pour Point, °C	ASTM D 97	-18
Flash point °C	ASTM D 92	245
TBN, mgKOH/gm	ASTM D 2896	8

Download DATA SHEET



Scan QR

AVAILABLE SIZE

1L , 2L , 3L , 4L , 5L , 6L , 20 L , 25L , 60L , 208L , 1000L , 25,000L - Bulk



DIESEL OIL

ROYAL SUPER FULL SYNTHETIC ENGINE OIL API CI4 SAE IS AN ADVANCED FULLY SYNTHETIC MOTOR OIL DESIGNED TO KEEP YOUR ENGINE RUNNING LIKE NEW BY PROVIDING EXCEPTIONAL WEAR PROTECTION, CLEANING POWER, AND OVERALL PERFORMANCE.

رويال سوپر

ROYAL[®]
SUPER

**GEAR
OIL**

**OVERALL
GEAR PROTECTION**

WWW.ROYALSUPER.AE



ROYAL SUPER VITAL TECH 75W-80 API GL 5

Manual transmission high performance gear oil

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.87
Viscosity @100°C, cSt	ASTM D 445	16.3
Viscosity @40°C, cSt	ASTM D 445	125
Viscosity Index	ASTM D 2270	139
Pour Point, °C	ASTM D 97	-39
Flash point °C	ASTM D 92	220

Download DATA SHEET



Scan QR



AVAILABLE SIZE

1L , 2L, 3L, 4L , 5L , 6L, 20 L , 25L , 60L, 208L , 1000L , 25,000L - Bulk

ROYAL SUPER VITAL TECH 75W-90 API GL 5

Manual transmission high performance gear oil

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.875
Viscosity @100°C, cSt	ASTM D 445	16.3
Viscosity @40°C, cSt	ASTM D 445	125
Viscosity Index	ASTM D 2270	139
Pour Point, °C	ASTM D 97	-39
Flash point °C	ASTM D 92	215

Download DATA SHEET



Scan QR



AVAILABLE SIZE

1L , 2L, 3L, 4L , 5L , 6L, 20 L , 25L , 60L, 208L , 1000L , 25,000L - Bulk

ROYAL SUPER VITAL TECH 80W-90 API GL 5

Manual transmission high performance gear oil

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.885
Viscosity @100°C, cSt	ASTM D 445	14.6
Viscosity @40°C, cSt	ASTM D 445	152
Viscosity Index	ASTM D 2270	96
Pour Point, °C	ASTM D 97	-21
Flash point °C	ASTM D 92	215

Download DATA SHEET



Scan QR



AVAILABLE SIZE

1L , 2L, 3L, 4L , 5L , 6L, 20 L , 25L , 60L, 208L , 1000L , 25,000L - Bulk

ROYAL SUPER VITAL TECH 85W-90 API GL 5

Manual transmission high performance gear oil

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.885
Viscosity @100°C, cSt	ASTM D 445	14.6
Viscosity @40°C, cSt	ASTM D 445	152
Viscosity Index	ASTM D 2270	96
Pour Point, °C	ASTM D 97	-21
Flash point °C	ASTM D 92	245

Download DATA SHEET



Scan QR



AVAILABLE SIZE

1L , 2L, 3L, 4L , 5L , 6L, 20 L , 25L , 60L, 208L , 1000L , 25,000L - Bulk

ROYAL SUPER VITAL TECH 85W-140 API GL 5

Manual transmission high performance gear oil



SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.894
Viscosity @100°C, cSt	ASTM D 445	25.3
Viscosity @40°C, cSt	ASTM D 445	375
Viscosity Index	ASTM D 2270	90
Pour Point, °C	ASTM D 97	-15
Flash point °C	ASTM D 92	260

Download DATA SHEET



Scan QR

AVAILABLE SIZE

1L , 2L , 3L , 4L , 5L , 6L , 20 L , 25L , 60L , 208L , 1000L , 25,000L - Bulk

ROYAL SUPER VITAL TECH SAE 90 API GL 5

Manual transmission high performance gear oil



SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.885
Viscosity @100°C, cSt	ASTM D 445	15
Viscosity @40°C, cSt	ASTM D 445	167
Viscosity Index	ASTM D 2270	94
Pour Point, °C	ASTM D 97	-21
Flash point °C	ASTM D 92	245

Download DATA SHEET



Scan QR

AVAILABLE SIZE

1L , 2L , 3L , 4L , 5L , 6L , 20 L , 25L , 60L , 208L , 1000L , 25,000L - Bulk

ROYAL SUPER VITAL TECH SAE 140 API GL 5

Manual transmission high performance gear oil



SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.894
Viscosity @100°C, cSt	ASTM D 445	25.8
Viscosity @40°C, cSt	ASTM D 445	380
Viscosity Index	ASTM D 2270	90
Pour Point, °C	ASTM D 97	-15
Flash point °C	ASTM D 92	265

Download DATA SHEET



Scan QR

AVAILABLE SIZE

1L , 2L , 3L , 4L , 5L , 6L , 20 L , 25L , 60L , 208L , 1000L , 25,000L - Bulk



GEAR OIL

ROYAL SUPER LUBRICANT GEAR OIL SAE API GL-5 IS MIXED WITH GREAT MINERAL BASE OIL AS WELL AS SOME ANTI-WEAR AND ANTI-FROTHING ADDED SUBSTANCES THAT HAVE SOLID OXIDATION AND FROTHING OBSTRUCTION USE IN UNCOMPROMISING ACTIVITIES TRACKED DOWN IN BUSINESS ARSENALS, MANUAL TRANSMISSIONS, AXELS, AND LAST DRIVES.

رويال سوپر

ROYAL[®]
SUPER



HYDRAULIC FLUID

**ANTIWEAR
HIGH PROTECTION**



WWW.ROYALSUPER.AE



ROYAL SUPER ULTRA TECH ISO-10

Heavy duty protection antiwear hydraulic fluid

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.858
Viscosity @100°C, cSt	ASTM D 445	2.75
Viscosity @40°C, cSt	ASTM D 445	10.4
Viscosity Index	ASTM D 2270	105
Pour Point, °C	ASTM D 97	-15
Flash point °C	ASTM D 92	190

Download DATA SHEET



Scan QR

AVAILABLE SIZE

1L , 2L , 3L , 4L , 5L , 6L , 20 L , 25L , 60L , 208L , 1000L , 25,000L - Bulk



ROYAL SUPER ULTRA TECH ISO-32

Heavy duty protection antiwear hydraulic fluid

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.868
Viscosity @100°C, cSt	ASTM D 445	5.15
Viscosity @40°C, cSt	ASTM D 445	32.8
Viscosity Index	ASTM D 2270	92
Pour Point, °C	ASTM D 97	-21
Flash point °C	ASTM D 92	215

Download DATA SHEET



Scan QR

AVAILABLE SIZE

1L , 2L , 3L , 4L , 5L , 6L , 20 L , 25L , 60L , 208L , 1000L , 25,000L - Bulk



ROYAL SUPER ULTRA TECH ISO-37

Heavy duty protection antiwear hydraulic fluid

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.869
Viscosity @100°C, cSt	ASTM D 445	5.65
Viscosity @40°C, cSt	ASTM D 445	37.5
Viscosity Index	ASTM D 2270	93
Pour Point, °C	ASTM D 97	-21
Flash point °C	ASTM D 92	215

Download DATA SHEET



Scan QR

AVAILABLE SIZE

1L , 2L , 3L , 4L , 5L , 6L , 20 L , 25L , 60L , 208L , 1000L , 25,000L - Bulk



ROYAL SUPER ULTRA TECH ISO-46

Heavy duty protection antiwear hydraulic fluid

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.868
Viscosity @100°C, cSt	ASTM D 445	6.7
Viscosity @40°C, cSt	ASTM D 445	46.8
Viscosity Index	ASTM D 2270	94
Pour Point, °C	ASTM D 97	-21
Flash point °C	ASTM D 92	215

Download DATA SHEET



Scan QR

AVAILABLE SIZE

1L , 2L , 3L , 4L , 5L , 6L , 20 L , 25L , 60L , 208L , 1000L , 25,000L - Bulk



ROYAL SUPER ULTRA TECH ISO-68

Heavy duty protection antiwear hydraulic fluid

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.873
Viscosity @100°C, cSt	ASTM D 445	8.49
Viscosity @40°C, cSt	ASTM D 445	66.5
Viscosity Index	ASTM D 2270	97
Pour Point, °C	ASTM D 97	-21
Flash point °C	ASTM D 92	230

Download DATA SHEET



Scan QR

AVAILABLE SIZE

1L , 2L , 3L , 4L , 5L , 6L , 20 L , 25L , 60L , 208L , 1000L , 25,000L - Bulk



ROYAL SUPER HYDRAULIC OIL ISO IS A HIGH-PERFORMANCE ANTI-WEAR HYDRAULIC OIL SPECIFICALLY FORMULATED FROM SELECTED BASE OILS AND A PROPRIETARY ADDITIVE SYSTEM TO PROVIDE WELL-BALANCED PERFORMANCE IN A RANGE OF APPLICATIONS.

MANUFACTURED FROM A HIGH QUALITY OF VIRGIN BASE OILS COMBINED WITH ANTI-WEAR ADDITIVES AND RUST INHIBITORS TO PROVIDE HIGHLY STABLE PREMIUM HYDRAULIC FLUIDS WITH QUALITY RESERVE FOR EXCELLENT PERFORMANCE UNDER SEVERE OPERATING CONDITIONS IN MOBILE INDUSTRIAL SERVICE. DESIGNED TO PROVIDE EASY OPERATION AND LONG-LIFE PERFORMANCE.



**ABSOLUTE ENGINE ENDURANCE
IN EVERY CONDITION**

WWW.ROYALSUPER.AE



ROYAL SUPER FLUID TECH ATF TYPE A

Energize performance automatic transmission fluid

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.85
Viscosity @100°C, cSt	ASTM D 445	6.8
Viscosity @40°C, cSt	ASTM D 445	36
Viscosity Index	ASTM D 2270	148
Pour Point, °C	ASTM D 97	-30
Flash point °C	ASTM D 92	215

Download DATA SHEET



Scan QR

AVAILABLE SIZE

1L , 2L, 3L, 4L , 5L , 6L, 20 L , 25L , 60L, 208L , 1000L , 25,000L - Bulk



ROYAL SUPER FLUID TECH ATF DEX II

Energize performance automatic transmission fluid

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.85
Viscosity @100°C, cSt	ASTM D 445	7.2
Viscosity @40°C, cSt	ASTM D 445	35.5
Viscosity Index	ASTM D 2270	160
Pour Point, °C	ASTM D 97	-45
Flash point °C	ASTM D 92	215

Download DATA SHEET



Scan QR

AVAILABLE SIZE

1L , 2L, 3L, 4L , 5L , 6L, 20 L , 25L , 60L, 208L , 1000L , 25,000L - Bulk



ROYAL SUPER FLUID TECH ATF DEX III

Energize performance automatic transmission fluid

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.850
Viscosity @100°C, cSt	ASTM D 445	7.7
Viscosity @40°C, cSt	ASTM D 445	39
Viscosity Index	ASTM D 2270	171
Pour Point, °C	ASTM D 97	-39
Flash point °C	ASTM D 92	210

Download DATA SHEET



Scan QR

AVAILABLE SIZE

1L , 2L, 3L, 4L , 5L , 6L, 20 L , 25L , 60L, 208L , 1000L , 25,000L - Bulk



ROYAL SUPER FLUID TECH ATF DEX VI

Energize performance automatic transmission fluid

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.85
Viscosity @100°C, cSt	ASTM D 445	6
Viscosity @40°C, cSt	ASTM D 445	30.5
Viscosity Index	ASTM D 2270	150
Pour Point, °C	ASTM D 97	-51
Flash point °C	ASTM D 92	215

Download DATA SHEET



Scan QR

AVAILABLE SIZE

1L , 2L, 3L, 4L , 5L , 6L, 20 L , 25L , 60L, 208L , 1000L , 25,000L - Bulk



ROYAL SUPER FLUID TECH ATF CVTF

Energize performance automatic transmission fluid

SPECIFICATION

Density @29.5°C, gm/CC	ASTM D 4052	0.85
Viscosity @100°C, cSt	ASTM D 445	7.15
Viscosity @40°C, cSt	ASTM D 445	34.7
Viscosity Index	ASTM D 2270	175
Pour Point, °C	ASTM D 97	-48
Flash point °C	ASTM D 92	215

Download DATA SHEET



Scan QR

AVAILABLE SIZE

1L , 2L, 3L, 4L , 5L , 6L, 20 L , 25L , 60L, 208L , 1000L , 25,000L - Bulk



ROYAL SUPER BRAKE FLUID DOT-3

Heavy duty high-quality synthetic

DESCRIPTION

Royal Super DOT 3 BRAKE FLUID is a high-quality synthetic brake and clutch fluid conforming to the DOT 3 specification and based on poly glycol type fluid that is a general standard used in world-wide automotive brake equipment. It is suitable for passenger cars, trucks and buses that require synthetic brake oil.

Download DATA SHEET



Scan QR

AVAILABLE SIZE

250ml, 500ml, 1L , 2L, 3L, 4L , 5L , 6L, 20 L , 25L , 60L, 208L , 1000L , 25,000L - Bulk



ROYAL SUPER BRAKE FLUID DOT-4

Heavy duty high-quality synthetic

DESCRIPTION

Royal Super DOT 4 BRAKE FLUID is a high-quality synthetic brake and clutch fluid conforming to the DOT 4 specification and based on poly glycol type fluid that is a high-performance standard used in worldwide automotive brake equipment. It is suitable for passenger cars, trucks and buses that require DOT 4 synthetic brake fluid, as well as high performance cars.

Download DATA SHEET



Scan QR

AVAILABLE SIZE

250ml, 500ml, 1L , 2L, 3L, 4L , 5L , 6L, 20 L , 25L , 60L, 208L , 1000L , 25,000L - Bulk



ROYAL SUPER RADIATOR COOLANT

Ultra long life radiator coolant 240,000km protection

DESCRIPTION

Royal Super Ultra Tech Radiator Coolant is a premium quality, Virgin ethylene glycol-based anti-coolant. Concentrate high quality coolant for year-round use. Ready-mixed high performance coolant designed to prevent winter freezing and summer overheating with very good protection against corrosion. It will give excellent corrosion protection to all metals used in the construction of gasoline and diesel engines especially the principle metals iron, copper and aluminum.

Download DATA SHEET



Scan QR

AVAILABLE SIZE

1L , 2L, 3L, 4L , 5L , 6L, 20 L , 25L , 60L, 208L , 1000L , 25,000L - Bulk

رويال سوپر

ROYAL[®]
SUPER

MOTORCYCLE
OIL

**PROTECTION
WHEREVER YOU GO**

WWW.ROYALSUPER.AE





ROYAL SUPER 2T STROKE OIL TC/JASO FD

Off road superior performance motorcycle engine oil

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.866
Viscosity @100°C, cSt	ASTM D 445	7.8
Viscosity @40°C, cSt	ASTM D 445	47.5
Viscosity Index	ASTM D 2270	135
Pour Point, °C	ASTM D 97	-24
Flash point °C	ASTM D 92	96
Sulphated Ash, %wt	ASTM D 874	0.09

Download DATA SHEET



Scan QR

AVAILABLE SIZE

1L , 2L, 3L, 4L , 5L , 6L, 20 L , 25L , 60L, 208L , 1000L , 25,000L - Bulk



ROYAL SUPER 2T STROKE OIL TC/JASO FB

Off road superior performance motorcycle engine oil

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.872
Viscosity @100°C, cSt	ASTM D 445	7.95
Viscosity @40°C, cSt	ASTM D 445	48.5
Viscosity Index	ASTM D 2270	135
Pour Point, °C	ASTM D 97	-24
Flash point °C	ASTM D 92	105
Foam Characteristics	ASTM 892	

Download DATA SHEET



Scan QR

AVAILABLE SIZE

1L , 2L, 3L, 4L , 5L , 6L, 20 L , 25L , 60L, 208L , 1000L , 25,000L - Bulk



ROYAL SUPER 4T STROKE OIL 10W-40 SN

Off road superior performance motorcycle engine oil

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.862
Viscosity @100°C, cSt	ASTM D 445	14.3
Viscosity @40°C, cSt	ASTM D 445	130
Viscosity Index	ASTM D 2270	158
Pour Point, °C	ASTM D 97	-33
Flash point °C	ASTM D 92	230
TBN, mgKOH/gm	ASTM D 2896	8
Foam Characteristics	ASTM 892	

Download DATA SHEET



Scan QR

AVAILABLE SIZE

1L , 2L, 3L, 4L , 5L , 6L, 20 L , 25L , 60L, 208L , 1000L , 25,000L - Bulk



ROYAL SUPER 4T STROKE OIL 10W-40 SL

Off road superior performance motorcycle engine oil

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.873
Viscosity @100°C, cSt	ASTM D 445	15
Viscosity @40°C, cSt	ASTM D 445	101
Viscosity Index	ASTM D 2270	156
Pour Point, °C	ASTM D 97	-33
Flash point °C	ASTM D 92	225
TBN, mgKOH/gm	ASTM D 2896	7.8
Foam Characteristics	ASTM 892	

Download DATA SHEET



Scan QR

AVAILABLE SIZE

1L , 2L, 3L, 4L , 5L , 6L, 20 L , 25L , 60L, 208L , 1000L , 25,000L - Bulk



ROYAL SUPER 4T STROKE OIL 20W-50 SL

Off road superior performance motorcycle engine oil

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.87
Viscosity @100°C, cSt	ASTM D 445	20.4
Viscosity @40°C, cSt	ASTM D 445	175
Viscosity Index	ASTM D 2270	136
Pour Point, °C	ASTM D 97	-27
Flash point °C	ASTM D 92	230
TBN, mgKOH/gm	ASTM D 2896	7.2
CCS @-15°C,mPa.s	ASTM D 5293	7500

Download DATA SHEET



Scan QR

AVAILABLE SIZE

1L , 2L , 3L , 4L , 5L , 6L , 20 L , 25L , 60L , 208L , 1000L , 25,000L - Bulk



ROYAL SUPER MOTORCYCLE OIL IS A HIGH-TECH OIL LUBRICANT THAT IS SUITABLE FOR ALL MOTORCYCLES THAT RUN ON LEAD-FREE GASOLINE, CATALYTIC CONVERTERS, HIGH-PERFORMANCE NORMALLY ASPIRATED GASOLINE ENGINES, AND LIGHT COMMERCIAL VEHICLES.


روپال سوپر

ROYAL[®]
SUPER

LUBRICANTS

ENGINE PROTECTION

ENGINE OIL

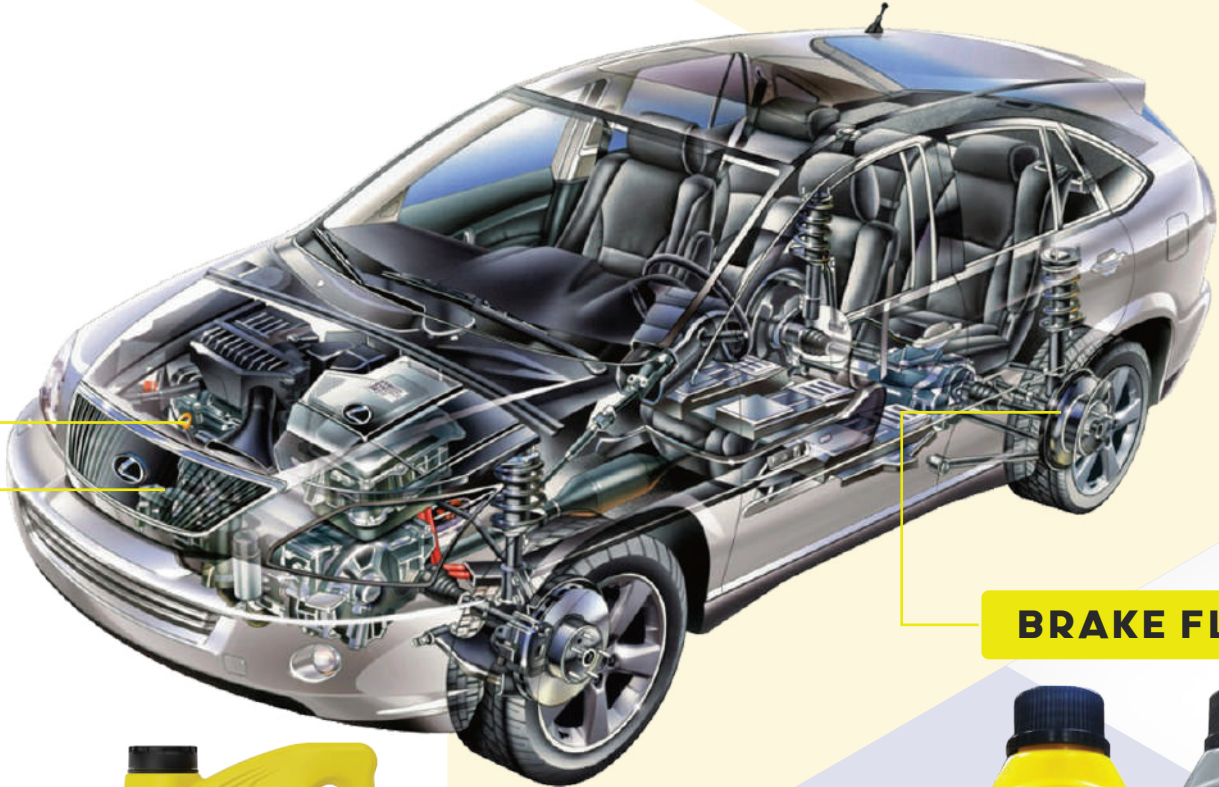

BRAKE FLUID



COOLANT

رويال سوپر

ROYAL[®]
SUPER

LUBRICANTS PRODUCTS



**208 LITERS
AVAILABLE**

رويال سوپر

ROYAL[®]
SUPER

**HIGH PERFORMANCE
ENGINE OIL**



1 L, 2L, 3L, 4L, 5L, 6 L - [CAN] 20L, 25 L - [PAIL] 60 L, 208 L - [DRUM] 1000 L, 25,000 L - [IBC]

Customize Packing

ORDER NOW!

FOR INQUIRIES

+971 55 125 3503

CALL OR WHATSAPP US

FOR INQUIRIES

INFO@ROYALSUPER.AE

SALES@ROYALSUPER.AE

EMAIL US

Follow us!

رويال سوپر



ON SOCIAL MEDIA
#ROYALSUPEROIL

SCAN QR CODE





20FT CONTAINER LOAD UP TO 26 TON

PRODUCTS	SIZE	UNITS	WEIGHT	QUANTITY	TOTAL WEIGHT
1L	CTN	12	11.4 KG	1400 CTN	15,960 KG
1L	CTN	24	22.8 KG	700 CTN	15,960 KG
2L	CTN	12	23.3 KG	685 CTN	15,960 KG
3L	CTN	6	17.35 KG	980 CTN	17,000 KG
4L	CTN	3	11.4 KG	1350 CTN	15,390 KG
4L	CTN	4	14.9 KG	1050 CTN	15,645 KG
4L	CTN	6	22.3 KG	700 CTN	15,610 KG
5L	CTN	3	14 KG	1100 CTN	15,400 KG
5L	CTN	4	18.4 KG	850 CTN	15,640 KG
5L	CTN	6	27.7 KG	550 CTN	15,235 KG
6L	CTN	3	16.9 KG	975 CTN	16,477 KG
6L	CTN	4	22.4 KG	780 CTN	17,476 KG
20L	PAIL	1	18.3 KG	960 PAIL	17,568 KG
25L	PAIL	1	22.6 KG	800 PAIL	18,080 KG
60L	DRUM	1	57 KG	324 DRUM	18,468 KG
208L	DRUM	1	190 KG	100 DRUM	19,000 KG



40FT CONTAINER LOAD UP TO 28 TON

PRODUCTS	SIZE	UNITS	WEIGHT	QUANTITY	TOTAL WEIGHT
1L	CTN	12	11.4 KG	2400 CTN	27,360 KG
1L	CTN	24	22.8 KG	1200 CTN	27,360 KG
2L	CTN	12	23.3 KG	1200 CTN	27,960 KG
3L	CTN	6	17.35 KG	1610 CTN	27,934 KG
4L	CTN	3	11.4 KG	2400 CTN	27,360 KG
4L	CTN	4	14.9 KG	1880 CTN	28,000 KG
4L	CTN	6	22.3 KG	1255 CTN	27,990 KG
5L	CTN	3	14 KG	1950 CTN	27,300 KG
5L	CTN	4	18.4 KG	1520 CTN	27,970 KG
5L	CTN	6	27.7 KG	1000 CTN	27,700 KG
6L	CTN	3	16.9 KG	1650 CTN	27,885 KG
6L	CTN	4	22.4 KG	1250 CTN	28,000 KG
20L	PAIL	1	18.3 KG	1530 PAIL	28,000 KG
25L	PAIL	1	22.6 KG	1240 PAIL	28,000 KG
60L	DRUM	1	57 KG	490 DRUM	27,930 KG
208L	DRUM	1	190 KG	145 DRUM	27,550 KG

ROYAL SUPER LUBRICANTS

 **HEAD OFFICE ADDRESS**
NO. 403, AL HABTOOR NAIF BUILDING, DEIRA,
DUBAI, UNITED ARAB EMIRATES

 **SHOWROOM ADDRESS**
SHOP 6, 21C ST, NAIF, DEIRA,
DUBAI, UNITED ARAB EMIRATES

 **PLANT ADDRESS**
SAJAA INDUSTRIAL, SHARJAH



ROYAL
SUPER

 **CONTACT US**

TEL +971 4 232 4844
PH. +971 55 125 3503

 **EMAIL**

INFO@ROYALSUPER.AE
SALES@ROYALSUPER.AE

 **WEBSITE**

WWW.ROYALSUPER.AE